

## Product data sheet




### Information

|             |                                                  |
|-------------|--------------------------------------------------|
| Designation | Hinged bar with integrated support prop - 600 mm |
| Reference   | 048859                                           |


### Product advantages

- + Raised position locking.
- + Reinforced aluminium tube.
- + Help to get up and stand.
- + Support prop with adjustable height.

### Description

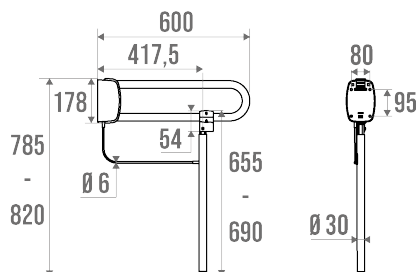

White epoxy-coated aluminium tube Ø 30 mm. Synthetic resin flange.  
With integrated support prop, adjustable height with a system of jack.  
Concealed fixings.  
Corrosion-resistant warranty.

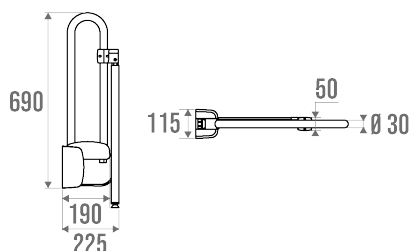

### Technical characteristics

|            |              |
|------------|--------------|
| Finish     | Epoxy-coated |
| Color      | White        |
| Dimensions | 600 mm       |
| Diameter Ø | 30 mm        |
| Material   | Aluminum     |

|                         |                                  |
|-------------------------|----------------------------------|
| Gross weight            | 2.800 kg                         |
| Packaging               | Printed Cardboard box            |
| Maximum Weight Capacity | 150 kg                           |
| Laboratory tests        | 225 kg                           |
| Made in France          | yes                              |
| Maintenance             | yes                              |
| Guarantee               | 10 years                         |
| Net weight              | 1.900 kg                         |
| Gencod                  | 3563390488591                    |
| Custom code             | 7615200000                       |
| Technical sheet         | <a href="#">S00002226_IND_01</a> |

## Fixing and maintenance advices

---

Recommended height for the horizontal part : 800 mm from the ground. Grab bars provide support and added safety if properly fitted in accordance with our technical instructions. Careful consideration and selection of the appropriate wall fixings according to the wall-mounted support is required to ensure the long life of your accessory. The use of stainless steel screws (Ø 4 mm) is highly recommended to prevent corrosion in damp environment. Before drilling, physically hold the product against the wall at desired position and mark the hole locations. All the fixing points must be respected. After installation and before use, make sure that all fixing screws are tightened securely. DO NOT use the grab bar as a step. DO NOT sit on or hang from the grab bar.

Fiche produit mise à jour le : 07/05/2024