

Product data sheet




Information

Designation	Exp'air pulsed air hand dryer, 430 x 343 x 232 mm. , White & Black Epoxy-coated Aluminium
Reference	878241

Product advantages

- + Easy cleaning : accessibility of antibacterian air filter.

Description

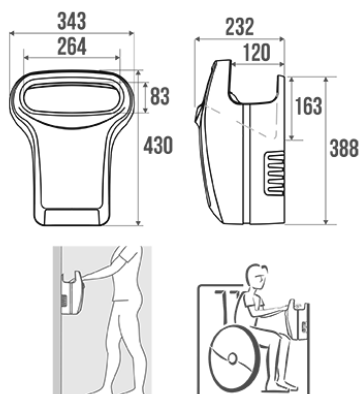

Rated voltage: 230 V - 50/60 Hz.
Rated power: 800 W (no heating resistance).
Patented capacitive sensing
Tank capacity: 600 ml.
Electronic security in case of malfunction.
Drying time: 10 to 15 seconds (All drying varies with the degree of humidity , the room temperature and the surface to dry).
Blue light one the drying area.
air speed: 160 km / h - outlet air temperature: 40 ° C
Moteur Brush
Automatic start.
Automatic lock of the tank and the air filter system.
Water boiler and tank easy to clean. Level detector when the tank is full. Tank to be emptied.
Possibility to connect the water collector to mains drainage.
Round flow. 2 sides air filter very accessible.
Sound level: 78 dBA (thanks to sound insulation in the rear module).
White epoxy-coated.

Vandal-resistant: Die-cast aluminium AS12 cowl.
Provided direct crest gate.

Technical characteristics

Finish	Epoxy-coated
Color	White & Black
Dimensions	430 x 343 x 232 mm.
Material	Aluminum
Gross weight	7.000 kg
Packaging	Monochrome box
Made in France	yes
Maintenance	yes
Guarantee	3 years
Gencod	3563398782417
Custom code	7615200000
Technical sheet	Notice Exp'Air - 4 langues

Fixing and maintenance advices

Careful consideration and selection of the appropriate wall fixings according to the wall-mounted support is required to ensure the long life of your accessory. The use of stainless steel screws ($\varnothing$ 4 mm) is highly recommended to prevent corrosion in damp environment. Before drilling, physically hold the product against the wall at desired position and mark the hole locations. All the fixing points must be respected. After installation and before use, make sure that all fixing screws are tightened securely.

Fiche produit mise à jour le : 10/01/2024